

WR 系列 一体式分离扩张器

ENERPAC 
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ 下图从上至下为: WR-15,A-92,WR-5,WR-13



- WR-15: 用于长行程扩张应用
- WR-5: 用于空间非常有限处
- A-92: 扩张器附件; 螺纹连接在RC-系列10吨液压缸上(除RC-101外)
- 单作用, 弹簧回程

▼ WR-5液压缸用来在某建筑工地定位一混凝土块。



A/WR 系列

工作能力:

0.75-1ton

咀尖厚度:


12.8-35mm

最大扩张:


292mm

最大工作压力:


700bar




WR-5



A-92

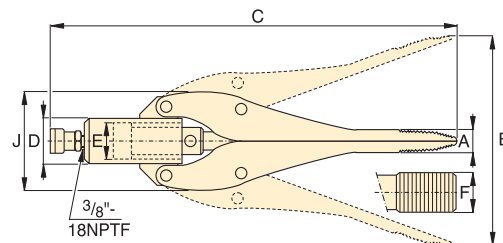

WR-15

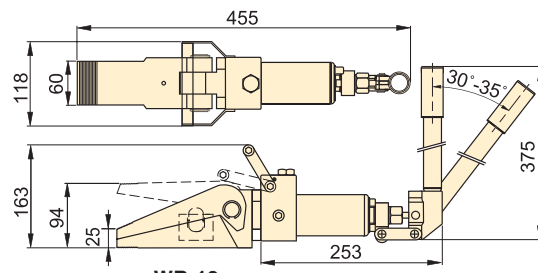

WR-13

液压缸 工作能力 ton(kN)	咀尖 厚度 (mm)	型号	液压缸 有效面积 (cm ²)	液压 油容量 (cm ³)	尺寸 (mm)							重量 (kg)
					A	B	C	D	E	F	J	
1 (8.9)	12.8	WR-5	6.5	10.0	9	94	223	—	28	51	51	2.3
0.75 (6)	32	WR-15	14.5	64.1	32	292	549	56	42	51	157	11.3
1 (8.9)	35	A-92	—	—	35	158	244	69	2 1/4" - 14 UNS	50	91	3.6
13.3	25	WR-13	11.34	120								12